



Variante


B

MASTERTRACK® BT FLUSH MOUNTING

Product highlights

- Installation with and without fixed glazing
- Simple glass clamping mechanism for secure hold
- Height adjustment ± 3 mm
- Smooth closing mechanism
- Safe anti-jump protection
- Revision of components possible at any time
- Floating floor guide with two-lane solution
- 2-leaf version incl. driver function
- Optional metal damper with high-quality hydraulics and double-sided spring guide



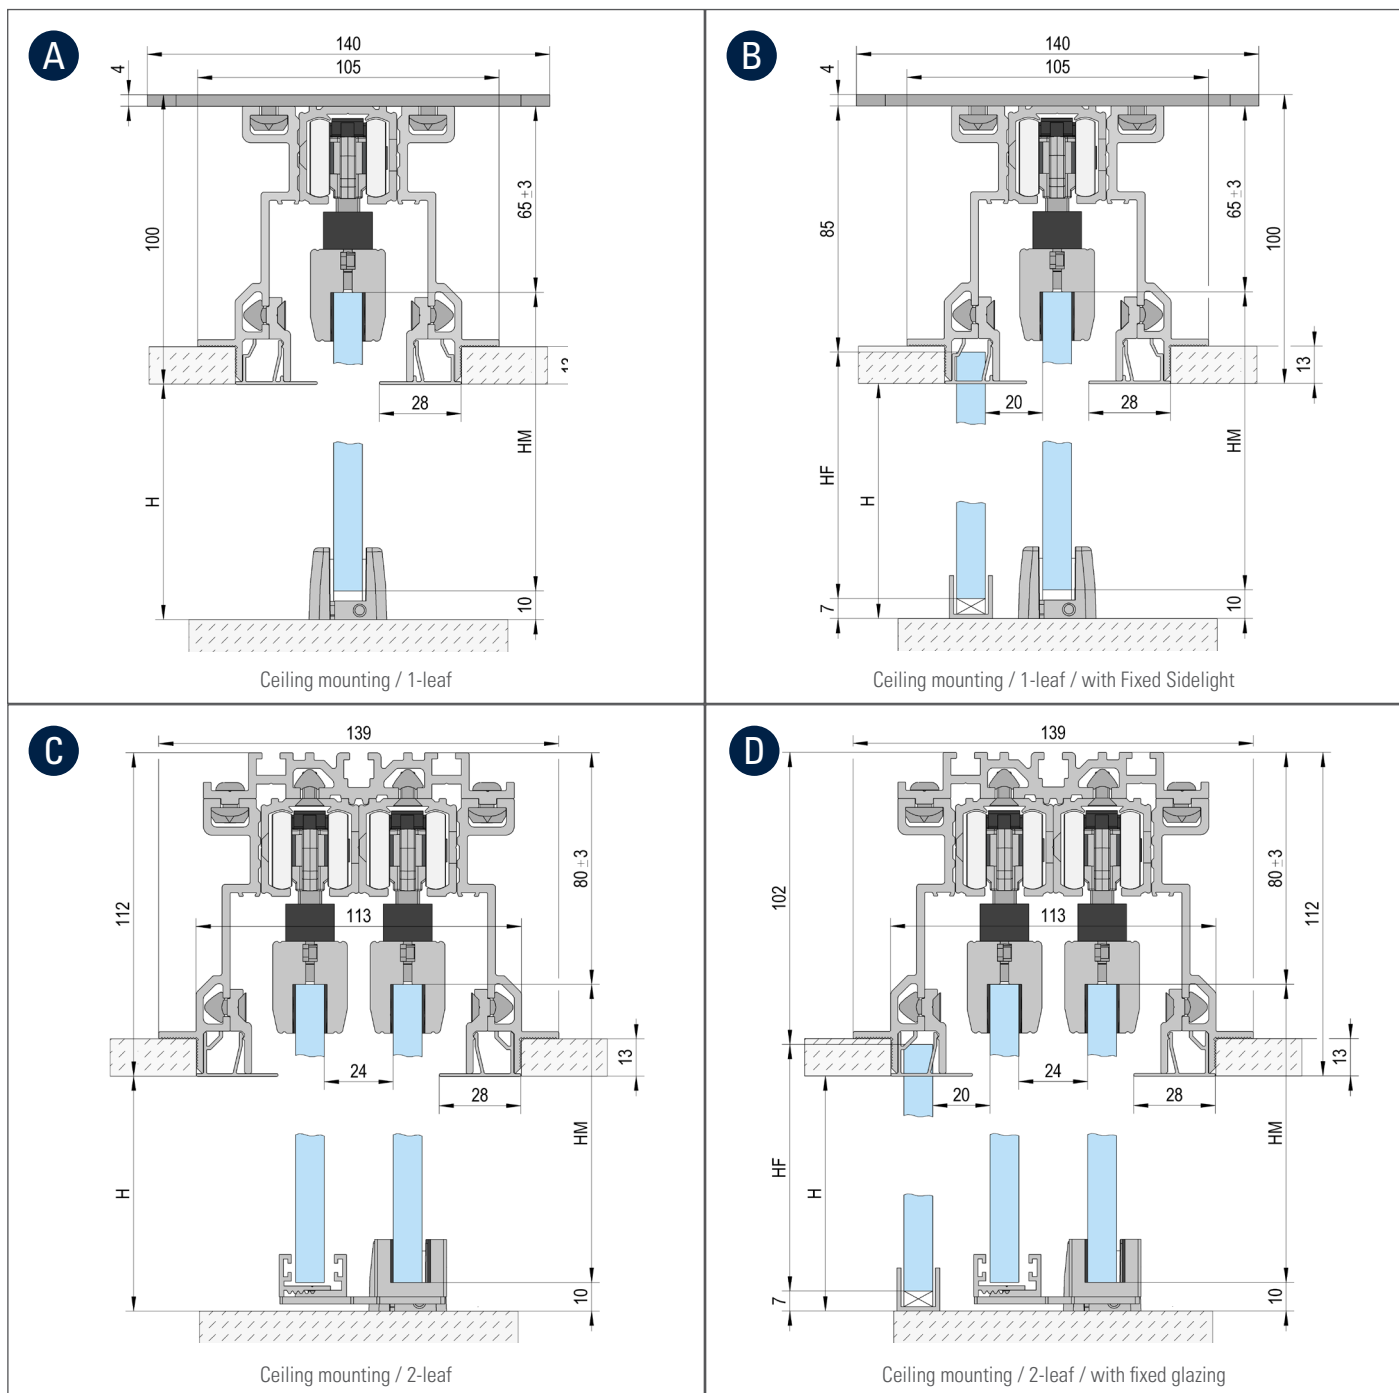

Glass height (HM) = H + 11 mm

Glass fixed part (HF) = H + 4 mm

PRODUCT	ART. NO.	A	B	C	D
Running Track 2/3/4/6m	BO 5802011/5803011/5804011/5806011	1x	1x	2x	2x
Profile Set for installation flush with the ceiling 1-flg. 3/6m	BO 5803051/5806051	1x	1x		
Profile Set for installation flush with the ceiling 2-flg. 3/6m	BO 5803061/5806061			1x	1x
Carriages	BO 5800002	1x	1x	2x	2x
Carriages incl. damping mechanism*	BO 5800060/5800080/5800120	2x*	2x*	4x*	4x*
Glass clamp set for flush installation on the ceiling for one door	BO 5800011	1x	1x		
Glass clamp set for flush installation on the ceiling for two doors	BO 5800012			1x	1x
U-Channels 2.5/5m	BO 6703434/6703446		1x	1x	

* Alternative to BO 5800002 bogie - The bogies are integrated in the retractable dampers. To install damping on both sides, two carriages are replaced by two retractable dampers.